

“AF Low Boy” ONLY Build Sheet

03.01.10

Order Date: _____

Quantity: _____
(Number of IDENTICAL units only!)

Distributor: _____

Job Name: _____ Salesman: _____ PO # _____

Common to all: All Low Boys are 200 gallon capacity, have fixed, non-removable tops, have EXTERNAL Overflows, and Bowled Tops. Canale style tops are not available.

Colors:

- | | | | |
|---|--|-------------------------------------|-------------------------------------|
| <input type="checkbox"/> Blueberry | <input type="checkbox"/> Bright Yellow | <input type="checkbox"/> Bright Red | <input type="checkbox"/> Dark Grey |
| <input type="checkbox"/> Bright Blue | <input type="checkbox"/> Light Adobe | <input type="checkbox"/> Latte | <input type="checkbox"/> Wickertone |
| <input type="checkbox"/> Bright Green | <input type="checkbox"/> Medium Adobe | <input type="checkbox"/> Black | <input type="checkbox"/> Natural |
| <input type="checkbox"/> Sherwood Green | <input type="checkbox"/> Dark Adobe | <input type="checkbox"/> White | |

Premium Resins (extra charge)

- Millstone
 Pink Granite
 Sandstone
 White Marble

SOLID COLOR

SPECKLED COLOR

Pick a Version


- Plus Version:** Complete assembly; includes Bowled Top with 17” Basket Strainer; (2) installed welded fittings: (1) 3/4” Drain Valve with Garden Hose Thread, and (1) 1-1/2” External Overflow.
- Standard Version:** Same as Plus Version, but without valve. Includes Bowled Top, Basket Strainer, and all welded fittings.

Tell us where to install your fittings.

- Factory DEFAULT locations are OK. These positions are “A” @ 0° / 360°, “B” @ 90°.
- I want CUSTOM locations at no extra charge! Please indicate below by placing the appropriate letter in the desired position. Notice “C” and “D” are optional at additional charge.

0°: _____
 90°: _____
 180°: _____
 270°: _____

45°: _____
 135°: _____
 225°: _____
 315°: _____

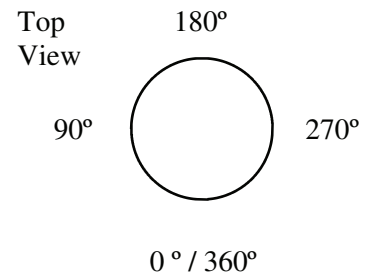

STANDARD Welded Fittings:

- A. Fitting for Drain Valve**
 3/4” installed as close to bottom as possible.
- B: Fitting for Primary External Overflow**
 1-1/2” installed as close to top lip as possible.

OPTIONAL Welded Fittings:

- C: Fitting for Bucket-high Throttling Valve**
 3/4” installed approx. 16” from bottom
- D. Fitting for Backup Overflow / Manifold**
 1-1/2” installed approx. 3” underneath lip.