

# “Cubo” ONLY Build Sheet

03.01.10

Order Date: \_\_\_\_\_

**Quantity:** \_\_\_\_\_

(Number of IDENTICAL units only!)

Distributor: \_\_\_\_\_

Job Name: \_\_\_\_\_ Salesman: \_\_\_\_\_ PO # \_\_\_\_\_

**Barrel Size:**     55 Gallon Vertical                       100 Gallon Vertical                       200 Gallon Vertical

**Top Style?**                       Polka Dot Top                       Pie-shaped Top

**Colors:**

<input type="checkbox"/> Blueberry	<input type="checkbox"/> Bright Yellow	<input type="checkbox"/> Bright Red	<input type="checkbox"/> Dark Grey
<input type="checkbox"/> Bright Blue	<input type="checkbox"/> Light Adobe	<input type="checkbox"/> Latte	<input type="checkbox"/> Wickertone
<input type="checkbox"/> Bright Green	<input type="checkbox"/> Medium Adobe	<input type="checkbox"/> Black	<input type="checkbox"/> Natural
<input type="checkbox"/> Sherwood Green	<input type="checkbox"/> Dark Adobe	<input type="checkbox"/> White	

**SOLID COLOR**                       **SPECKLED COLOR**

**Pick  
a  
Version**

- Plus Version:** includes all components necessary to capture water
- Standard Version:** Same as Plus Version, but without Internal Overflow piping and valve. Includes all welded fittings, and Screened Top with all associated mounting hardware.
- Basic Version:** Same as Standard Version, but without the installed welded fittings. Includes Screened Top and all associated mounting hardware.

**For Versions  
Plus, Standard,  
and Pump**


Factory DEFAULT locations are OK. These positions are “A” @ 0° / 360°, “B” @ 90°.

I want CUSTOM locations at no extra charge!

Please indicate below by placing the appropriate letter in the desired position. Notice “C” and “D” are optional at additional charge.

**Tell us  
where to  
install your  
fittings.**

0°: _____	45°: _____
90°: _____	135°: _____
180°: _____	225°: _____
270°: _____	315°: _____

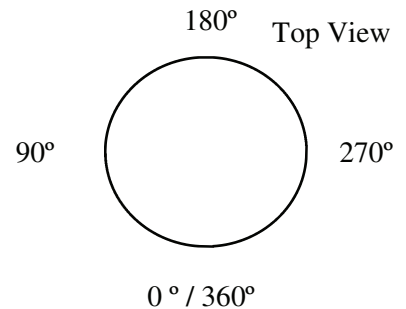

**STANDARD welded fittings:**

A: Fitting for Drain Valve  
3/4” NPT Fitting; Single Threaded; Natural Color;  
installed as close to bottom as possible.

B: Fitting for Primary Overflow  
1-1/2” NPT Fitting; Double Threaded; Natural Color;  
installed as close to bottom as possible.

**OPTIONAL welded fittings:**

C: Fitting for Bucket-high Throttling Valve  
3/4” Fitting; installed approx. 16” from bottom.

D: Fitting for Backup Overflow / Manifold  
1-1/2” Fitting; installed approx. 3” underneath lip.