

# ‘Peso’ ONLY Build Sheet

03.01.10

Order Date: \_\_\_\_\_

**Quantity:** \_\_\_\_\_

(Number of IDENTICAL units only!)

Distributor: \_\_\_\_\_

Job Name: \_\_\_\_\_ Salesman: \_\_\_\_\_ PO #: \_\_\_\_\_

**Barrel Size:**       50 Gallon Vertical ONLY       65 Gallon Vertical ONLY

**Colors:**

<input type="checkbox"/> Blueberry	<input type="checkbox"/> Bright Yellow	<input type="checkbox"/> Bright Red	<input type="checkbox"/> Dark Grey
<input type="checkbox"/> Bright Blue	<input type="checkbox"/> Light Adobe	<input type="checkbox"/> Latte	<input type="checkbox"/> Wickertone
<input type="checkbox"/> Bright Green	<input type="checkbox"/> Medium Adobe	<input type="checkbox"/> Black	<input type="checkbox"/> Natural
<input type="checkbox"/> Sherwood Green	<input type="checkbox"/> Dark Adobe	<input type="checkbox"/> White	

**SOLID COLOR**       **SPECKLED COLOR**

**Pick  
a  
Version**

- Plus Version:** Complete assembly; includes Screened Top with Snap Ring; (2) installed welded fittings: (1) 3/4" Drain Valve w/ Garden Hose Thread, and (1) 1-1/2" External Overflow.
- Standard Version:** Same as Plus Version, but without valve. Includes Screened Top with Snap Ring and all welded fittings.
- Basic Version:** Same as Standard Version, but without the installed welded fittings. Includes Screened Top with Snap Ring.


**For Versions  
Plus and  
Standard**

Factory DEFAULT locations are OK. These positions are "A" @ 0° / 360° and "B" @ 90°.

I want CUSTOM locations at no extra charge! Please indicate below by placing the appropriate letter in the desired position. Notice "C" and "D" are optional at additional charge.

**Tell us  
where to  
install your  
fittings.**

0°: _____	45°: _____
90°: _____	135°: _____
180°: _____	225°: _____
270°: _____	315°: _____

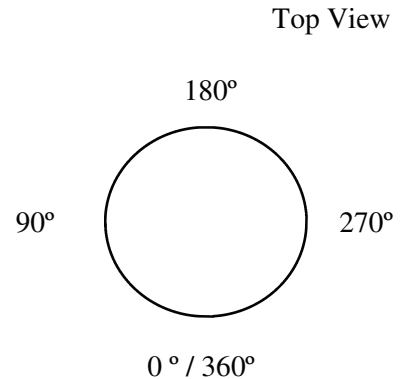

**STANDARD Welded Fittings:**

- A:** Fitting for Drain Valve  
3/4" NPT Fitting; Single Threaded; Natural Color; installed as close to bottom as possible.
- B:** Fitting for Primary Overflow  
1-1/2" NPT Fitting; Single Threaded; Natural Color; installed as close to top lip as possible.

**OPTIONAL Welded Fittings:**

- C:** Fitting for Bucket-high Throttling Valve  
3/4" NPT Fitting; Single Threaded; Natural Color; installed approx. 16" from bottom.
- D:** Fitting for Backup Overflow / Manifold  
1-1/2" Nominal Pipe Thread (NPT) Fitting; Single Threaded; Natural Color; installed as close to top lip as possible.