

“AF Remote Tank” ONLY Build Sheet

03.01.10

Order Date: _____

Quantity: _____

(Number of IDENTICAL units only!)

Distributor: _____

Job Name: _____ Salesman: _____ PO # _____

Barrel Size: 55 Gallon Vertical 100 Gallon Vertical 200 Gallon Vertical
 200 Gallon Low Boy 360 Gallon Vertical

Standard Top: As the Remote Tank is used independent of other tanks, it has a non-removable top with (1) 4-1/4” Ring & Cap in the center to be used as a fill port.

Colors:

- | | | | |
|---|--|-------------------------------------|-------------------------------------|
| <input type="checkbox"/> Blueberry | <input type="checkbox"/> Bright Yellow | <input type="checkbox"/> Bright Red | <input type="checkbox"/> Dark Grey |
| <input type="checkbox"/> Bright Blue | <input type="checkbox"/> Light Adobe | <input type="checkbox"/> Latte | <input type="checkbox"/> Wickertone |
| <input type="checkbox"/> Bright Green | <input type="checkbox"/> Medium Adobe | <input type="checkbox"/> Black | <input type="checkbox"/> Natural |
| <input type="checkbox"/> Sherwood Green | <input type="checkbox"/> Dark Adobe | <input type="checkbox"/> White | |

**Premium Resins
(extra charge)**

- Millstone
- Pink Granite
- Sandstone
- White Marble

SOLID COLOR

SPECKLED COLOR

**Pick a
Version**


- Plus Version:** Includes 4-1-4” Ring & Cap, 3/4” welded fitting used as a drain, and 3/4” Butterfly valve.
- Standard Version:** Includes 4-1/4” Ring & Cap and 3/4” welded fitting.
- Basic Version:** Same as Standard Version, but without the installed welded fittings.

**Tell us
where to
install your
fittings.**

Factory DEFAULT Only: The only standard fitting is 3/4” drain fitting at “A” @ 0° / 360°.

Please install the optional (additional charge) fitting(s) at the locations specified below. Assume “A” is at 0° / 360°.

0°: _____	45°: _____
90°: _____	135°: _____
180°: _____	225°: _____
270°: _____	315°: _____

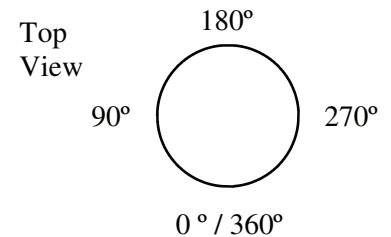

A. Fitting for Drain Valve

3/4” NPT Fitting; Single Threaded; Natural Color; installed as close to bottom as possible.

B: Fitting for Primary Overflow

1-1/2” NPT Fitting; Double Threaded; Natural Color; installed as close to bottom as possible.

*AF 360 Remote Tank has a 2” NPT Fitting.

C: Fitting for Bucket-high Throttling Valve

3/4” NPT Fitting; Single Threaded; Natural Color; installed approx. 16” from bottom

D. Fitting for Backup Overflow / Manifold

1-1/2” NPT Fitting; Double Threaded; Natural Color; installed approx. 3” underneath lip.

*AF 360 Remote Tank has a 2” NPT Fitting.